


# The Breakthrough: SAERTEX-LINER® Type S<sup>+</sup>

The innovative GRP-Liner with the highest mechanical properties!



- **Extremely high mechanical properties**
- **Better handling through lower weight**
- **Shorter curing time**
- **Even more economical**
- **Also available as SAERTEX-LINER® Premium Type S<sup>+</sup>**

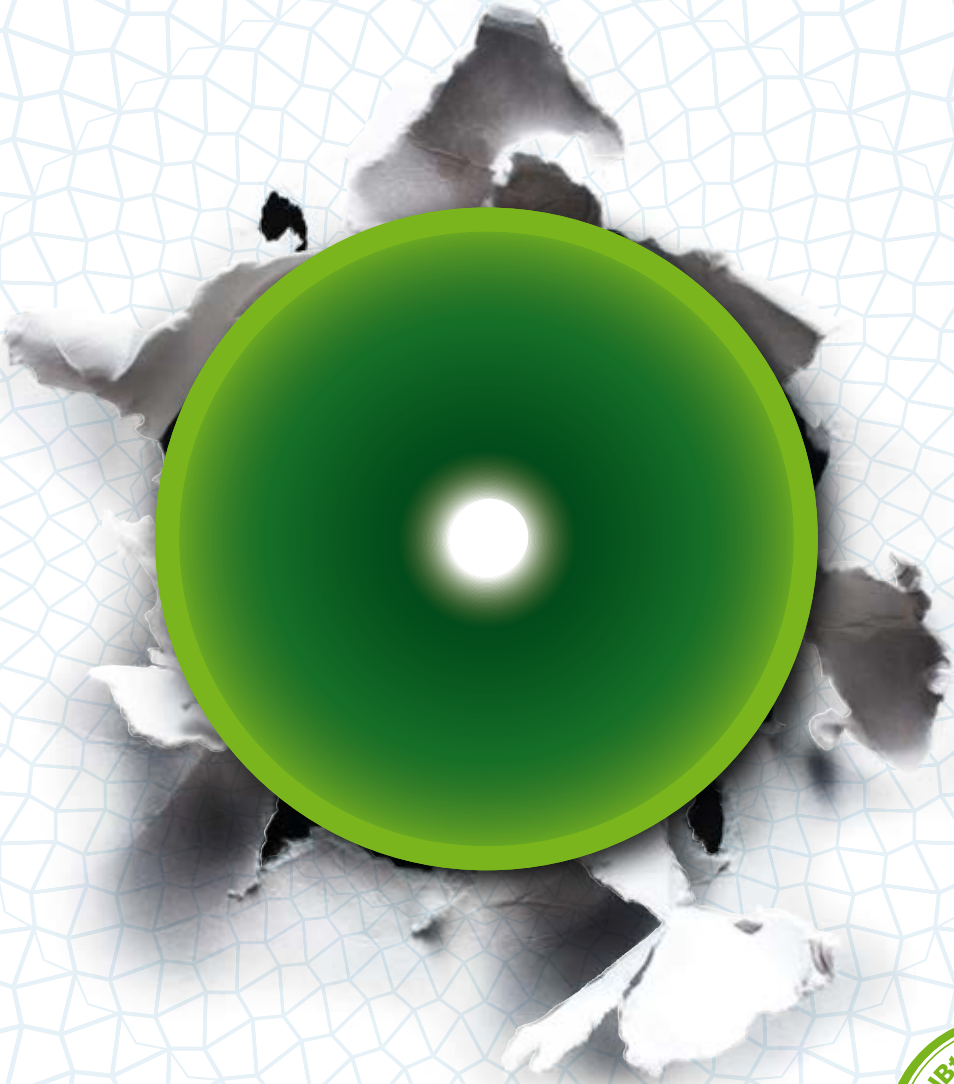

Short-term circumferential E-Modul (ring stiffness)	≥ 20,500 N/mm <sup>2</sup>
Long-term circumferential E-Modul (ring stiffness)	16,000 N/mm <sup>2</sup>
Short-term bending E-Modul (three-point bending)	≥ 16,800 N/mm <sup>2</sup>
Short-term bending strength (three-point bending)	≥ 270 N/mm <sup>2</sup>
Long-term bending strength (three-point bending)	210 N/mm <sup>2</sup>
Reduction factor A after 10 000 h	1.28
Dimension range	DN 150 mm - DN 1,600 mm
Wall thickness in cured condition	3 mm - 15 mm



[www.facebook.de/saertexmulticom](http://www.facebook.de/saertexmulticom) | [www.saertex-multicom.de](http://www.saertex-multicom.de)

