

SAERTEX-LINER[®] MULTI

PROVEN THOUSANDS OF TIMES OVER



SAERTEX-LINER[®] MULTI is an efficient, cost-effective solution that offers industry leading performance. Two design options make this GFR pipe liner the timesaving, flexible and sustainable choice when it comes to the trenchless rehabilitation of municipal wastewater pipes and pressure lines:

- Type S+: strong mechanical properties for numerous applications
- Type S+ XR: suitable for pressure lines up to 33 bar

OUR MOST VERSATILE LINER

INSTALLATION-FRIENDLY CONSTRUCTION


The construction of SAERTEX-LINER[®] MULTI allows higher pulling forces and prevents the liner from overstretching. Its reduced weight makes for easy handling, and the lower wall thicknesses shorten curing times. The “FastPlus” option saves even more installation time because the inner foil stays in place after curing.

UV LIGHT AND PROTECTIVE OUTER FOIL

SAERTEX-LINER INDUSTRY[®] outer foil provides protection from UV light, installation damage, and site contaminates. The outer protective foil also doubles as a glide foil. Please review the instruction manual for details associated with this installation method.

TECHNICAL SERVICE LIFE OF 100 YEARS

The unique ECR fiberglass reinforcement that makes up our liner is based on multiaxial fabric technology that withstands high mechanical stresses and offers a minimum long-term reduction factor after 20,000 hours (acc. to DIN EN 761).

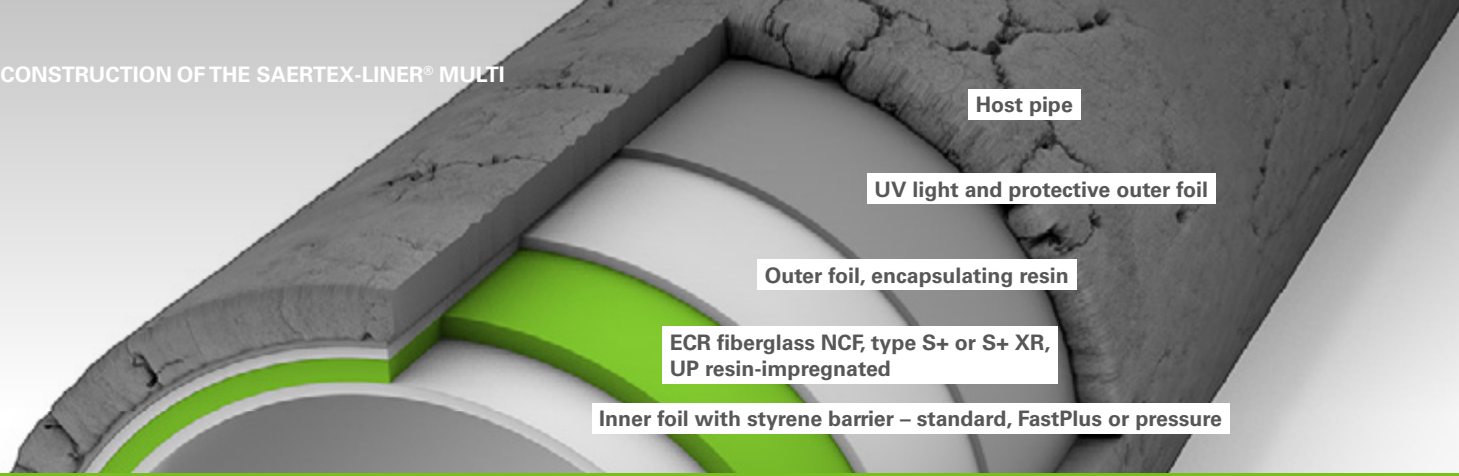

UV-CIPP FOR MUNICIPAL WASTEWATER PIPES

1 Select your UV-CIPP product application.

| PRODUCT APPLICATION | SAERTEX-LINER® MULTI |
|-------------------------------------|-------------------------------------|
| Utilization | Municipal wastewater and stormwater |
| Resin type | UP |
| Temperature and chemical resistance | + |
| Styrene-free | no |

2 Engineered to match profile, dimensions and application requirements.

| DESIGN | TYPE E | TYPE S+ | TYPE S+ XR |
|--------------------------------|-------------------------------|-----------|------------|
| Host pipe profile | Circular | All types | Circular |
| Application | Gravity | Gravity | Pressure |
| Operating pressure [BAR] | | | up to 1 |
| Fully structural* | ☉ | ☉ | ☉ |
| Diameter [mm] | 200–600 | 150–1600 | 250–1200 |
| Structural wall thickness [mm] | 3–6 | 3–15 | 4–12 |
| Max. length [m] | up to 350 [longer on request] | | |

3 Outer foils are standard. Inner foil can be selected based on application.

| FOILS | | | | |
|-----------------------------------|---|----------|---|---|
| Outer foils: | | | | |
| – Integrated gliding foil | ☉ | ☉ | ☉ | ☉ |
| – Resin encapsulating barrier | ☉ | ☉ | ☉ | ☉ |
| Inner foil with barrier function: | | | | |
| – Standard (temporary) | ☉ | ☉ | | |
| – FastPlus (semi-permanent)** | | Optional | | |
| – Pressure (permanent) | | | ☉ | ☉ |

| MECHANICAL CHARACTERISTICS | TYPE S+ and TYPE S+ XR |
|---|------------------------|
| Short-term circumferential E modulus [N/mm ²] | ≥ 20,500 |
| Long-term circumferential E modulus [N/mm ²] | 16,000 |
| Short-term bending E modulus [N/mm ²] | ≥ 16,800 |
| Short-term bending stress [N/mm ²] | ≥ 270 |
| Long-term bending stress [N/mm ²] | 210 |
| Reduction factor (acc. to DIN EN 761): | |
| – 50 years [after 10,000 h] | 1.28 |
| – 100 years [after 20,000 h] | 1.31 |

* Design classification for pressure applications | Class IV AWWA M28 | ** FastPlus available for DN 200 to DN 1500 mm diameter range and max wall thickness of 12 mm

See a virtual lining project!



MULTIPLE SAVINGS

FASTPLUS INNER FOIL: A TIME-SAVING OPTION THAT PROVIDES EXTRA PROTECTION

This rugged inner foil remains inside the liner after curing and saves your team installation time. FastPlus also makes it easier to introduce the UV source, even under difficult installation conditions.

APPROVED BY INDEPENDENT BODIES

- ☉ DIBt-Approval: Z-42.3-350
- ☉ CSTB: DTA 17/16-311
- ☉ WRc: PT/458/0620
- ☉ Others on request